

Our products / Protection against direct effects of lightning

> Capture systems

■ Capture points

Those elements are often use to complete a lightning portection by ESE in order to protect structure with many salient angle (cathedral, castle, ...).

[To use with their adapted fastening systems (Ref. 17012 or 17013). Their M10 threading enables a safety and simple installation.

• 17001/17002




| Ref | Material | Diameter | Length | Weight |
|-------|-----------|----------|--------|---------|
| 17001 | S/s 304 L | 17 mm | 30 cm | 0,5 kg |
| 17002 | S/s 304 L | 17 mm | 50 cm | 0,91 kg |

■ The simple and multiple rod

Air Terminals with simple rods to protect roof structures, chimneys, ...


[This tips adapt (themselves) perfectly on the poles.
(Ref : 11042 à 11045

• 10013/10014/10017

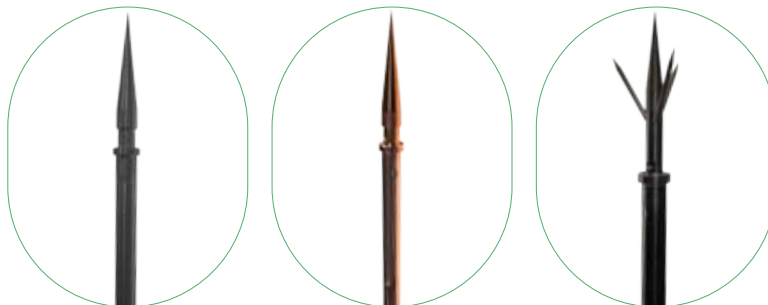


| Ref | Material | Diameter | Length | Weight |
|-------|-------------------------|----------|--------|--------|
| 10013 | S/s 304 L | 30 mm | 2,15 m | 5 kg |
| 10014 | S/s copper bonded 304 L | 30 mm | 2,15 m | 5 kg |
| 10017 | S/s 304 L | 30 mm | 2,15 m | 5 kg |

Ref. 17001

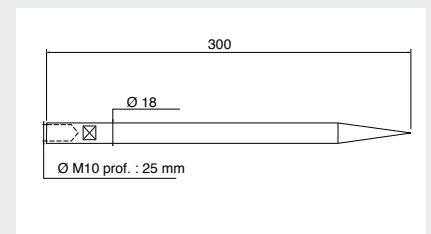

Ref. 10013/10014

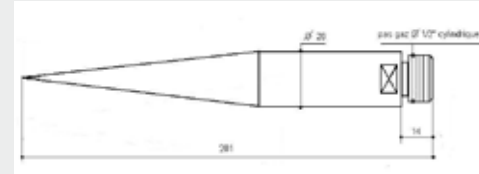

Ref. 10017

