

Our Products for the indirect lightning protection


> Class I Surge Protective Devices >

■ 1 pole SPD – 25 kA to 50 kA

High impuled current: 25 kA, 35 kA and 50 kA.

Direct and indirect protection of 1 and 3-phase power supply network installations for areas with high risk of lightning strikes (high keraunic level).

Equipped with a remote and optical fault indicator contact.

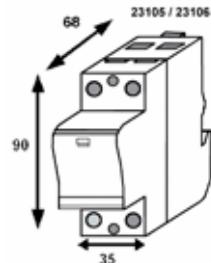

Ref. 23105/23106

Ref	Module	Max voltage Uc	Impulse discharge current Iimp	Nominal discharge current In	Level of protection under Up sous In	Equipped with a remote fault indicator contact
23105	2	440 VAC	25 kA	25 kA	2 kV	Yes
23106	2	335 VAC	25 kA	25 kA	1,3 kV	Yes




■ Monobloc SPD – 25 kA

High impuled current: 25 kA.

Direct and indirect protection of 1 and 3-phase power supply network installations for areas with high risk of lightning strikes (high keraunic level).

Equipped with a remote and optical fault indicator contact.

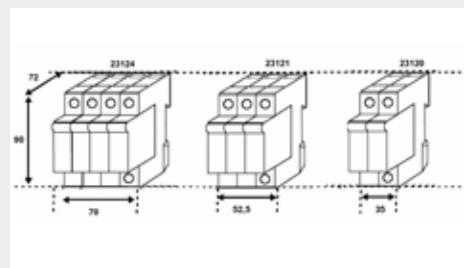

Ref. 23120/23121/23122/23123/23124

Ref	Module	Max voltage Uc	Impulse discharge current Iimp	Nominal discharge current In	Level of protection under Up sous In	Equipped with a remote fault indicator contact
23120	2 L + N	335 VAC	25 kA	25 kA	1,3 kV	Yes
23121	3 3*L	335 VAC	25 kA	25 kA	1,4 kV	Yes
23122	8 3*L	440 VAC	25 kA	25 kA	2,2 kV	Yes
23123	8 3*L + N	440 VAC	25 kA	25 kA	2,2 kV	Yes
23124	4 3*L + N	335 VAC	25 kA	25 kA	1,4 kV	Yes

