

Our Products for the indirect lightning protection

> Class II Surge Protective Devices >


■ Multipolar SPD – 15 kA

Discharge currents of 15 kA.

Primary protection of 1-phase power supply installations situated in exposed areas (high keraunic level) or as a complement to type 1 SPD. Equipped with a remote and optical fault indicator contact.

- 23214/23216/23218

| Ref | Module Network | Max voltage U_c | Max discharge current I_{imp} | Nominal discharge current I_n | Level of protection U_p under I_n | Replacement plug | Equipped with a remote fault indicator contact |
|-------|----------------|-------------------|---------------------------------|---------------------------------|---------------------------------------|------------------|--|
| 23214 | 2 L + N | 335 VAC | 40 kA | 20 kA | 1,5 kV | 23220 | Yes |
| 23216 | 3 3L* | 335 VAC | 15 kA | 5 kA | 1,1 kV | 23220 | Yes |
| 23218 | 4 3*L + N | 335 VAC | 15 kA | 5 kA | 1,1 kV | 23220 | Yes |

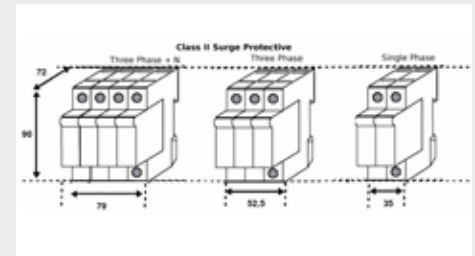

Ref. 23214/23216/23218



> Telephonic, data and network SPD >


■ Telephonic, data and network SPD – 10 kA

Protection of analog (RTC/ADSL broadband) and digital (Numéris) telephones.

Examples: modems, faxes, telephones, answering machines, transmitters

- 23414/23415

| Ref | Application | Max discharge current I_{imp} | Nominal discharge current I_n | Level of protection U_p under I_n | Replacement plug |
|-------|-------------|---------------------------------|---------------------------------|---------------------------------------|------------------|
| 23414 | RTC/ADSL | 185 VDC | 10 kA | 5 kA | 20403 |
| 23415 | Numéris | +7 VDC | 10 kA | 5 kA | 23404 |

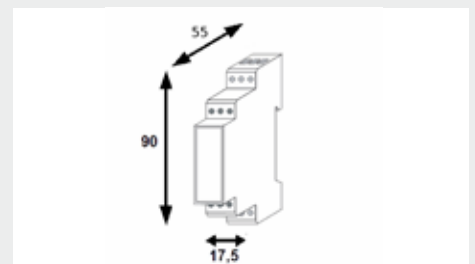

Ref. 23414/23415

