

## Our Products for the indirect lightning protection

### > Renewable photovoltaic and wind systems >


#### ■ Multipolar class II – 40 kA

Maximum impulsive current: 40 kA.

Direct and indirect protection of photovoltaic and wind generator installations situated in high risk areas of lightning strikes. (high keraunic level).

Equipped with an optical fault indicator contact.

- 23222/23223/23224

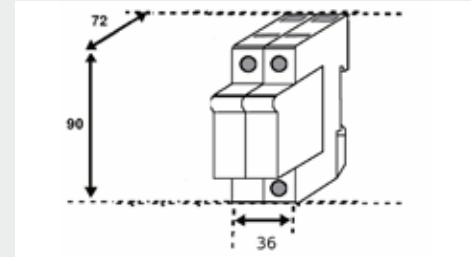

Ref. 23222/23223/23224

Ref	Module Network	Max voltage $U_c$	Maximal discharge current $I_{max}$	Nominal discharge current $I_n$	Level of protection $U_p$ under $I_n$	Replacement plug	Equipped with a remote fault indicator
23222	2 PV	550 VDC	40 kA	20 kA	2,1 kV	23227	No
23223	3 PV	1000 VDC	40 kA	20 kA	4 kV	23228	No
23224	1 Wind generator	690 VAC / 900 VAC	40 kA	20 kA	3 kV	23229	No

