



TECHNICAL DATASHEET

CHARACTERISTICS


Reference	30 001
Description	DIGICOUNT®
Technology	Digital
Functioning	Activation with lightning current radiated fields.
Detection range	1 kA – 100 kA
Registry	Until 999 999 events
Reset mode	Possibility to reset the counter display
Power supply	Lithium battery 3,6 Volts
Protection Index	IP67
Operating temperature	-20°C to +70°C
Dimensions	80 x 60 x 30 mm
Weight	150 g

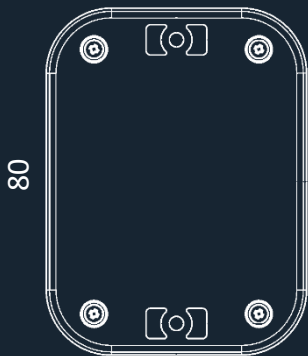

INSTALLATION

Parallel mounting	No need to cut the conductor Front face screwing
Connection	Directly on the earthing conductor
Design	Compact and discreet on the conductor
Robustness and liability	High resistance for climatical extreme conditions (rain, sun, frost...)

Exterior installation

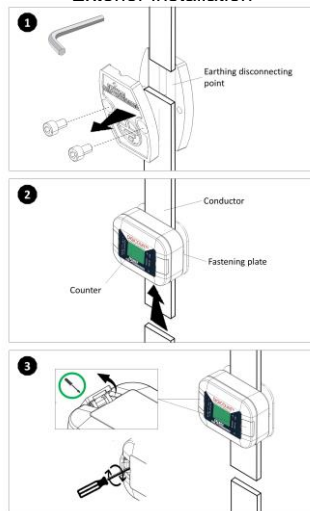

Interior installation



STANDARDS & CERTIFICATIONS

NF EN 62 561-6	Lightning protection system components (LPSC) - Part 6 : requirements for lightning strike counters (LSC)
----------------	---

Qualifoudre
INERIS
N° 051168729019



CONFORM TO
NF EN 62 561-6