

TECHNICAL DATASHEETS



FEATURES

Reference	11049 - 11050 - 11051
Designation	Extension mast for fixing poles
Warranty	1 year
Material	316L stainless steel
Ref. 11049: 1st extension mast	Length = 2 m / Weight = 3 kg / Diam. = 33.7 mm
Ref. 11050: 2nd extension mast	Length = 2 m / Weight = 6 kg / Diam. = 42.4 mm
Ref. 11051: 3rd extension mast	Length = 2 m / Weight = 7 kg / Diam. = 48.3 mm


USING

These high-safety 316L stainless steel extension masts are designed to raise the ESE air terminal to the highest point of the building, in accordance with NF EN 62561-2 and NV 65.

Can be used in combination, depending on the height required.

All extension masts are supplied with a stainless steel fixing ring at the bottom.

Simply fit the extension masts together and tighten the screw.

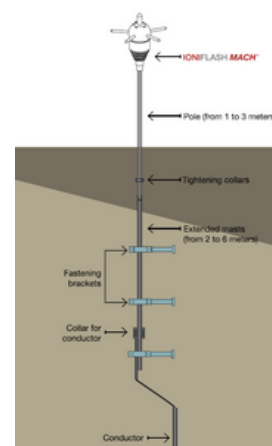

INSTALLATION

Conditioning	Delivered ready to install
Fixing system	Stainless steel clamping ring
Maximum height	7.40 m (including ESE air terminal head)
Wind resistance	Guy wire kit (ref. 18202)

FIXING ON THE BUILDING

On a facade	Bolt-on or cast-in brackets	Ref. 12001 ou 12012
On a mast	Offset or side brackets	Ref. 12014 ou 12016 ou 12026
On chimney	Hoopings	Ref. 12003
On wooden frames	Anchor bolt	Ref. 90079 ou 90080
On any other support	Universal brackets	Ref. 12006