

TECHNICAL DATASHEET

CHARACTERISTICS


Reference	16152
Designation	Earth grid - Equivalent length 24 m
Weight	12.5 kg
Deployed dimensions	162 x 162 x 0.5 cm
Equivalent length	24.36 m
Material	Tinned copper 30 x 2 mm + Copper pop rivets
Compliance	NF EN 62561-2

USAGE

Ideal solution for rocky ground, this earthing grid ensures that lightning currents flow horizontally through the ground.

It can be interconnected to another grid (with a flat/flat connection) and to one or more earth rod(s) if required.

We recommend burying the grid at least 50 cm underground.

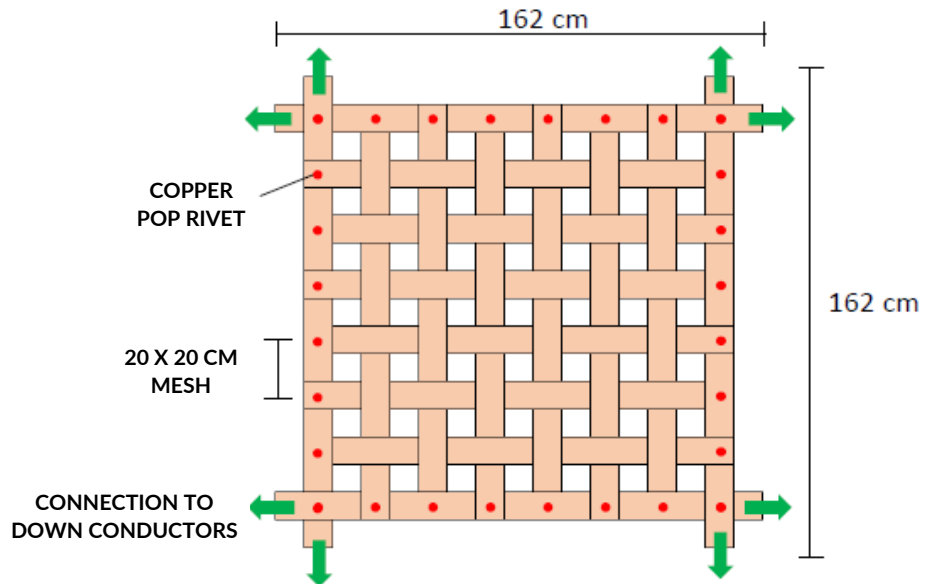

Example of the use of 4 earthing grids with flat/flat connection to the down conductor:

