

TECHNICAL DATASHEET


CHARACTERISTICS

| | | |
|--------------|-----------------------------|----------------------|
| Reference | 31001 | 13501 |
| Description | MACHTEST® | 7m Control Wire * |
| Feature | LCD Display | UV + Rain protection |
| Power supply | 3 piles AAA 1,5V (fournies) | Aucune |
| Weight | 100 g | ≈ 60g/m |
| Dimensions | 115x70x28 | Ø 7 mm |
| Warranty | 1 an | 10 ans |

* Cable length can be adapted on demand (max: 100m).

TEST METHOD

- The cable continuously connected to the ESEAT allows a direct communication.
- For the control of the functioning of the ESEAT, from the ground or the roof, the MACHTEST® control box is connected to the cable.
- With the connection of the MACHTEST®, the control procedure starts automatically.
- At the end of the sequence, the result of the test is directly available on the MACHTEST® control box avoiding all risks of misinterpretation and lack of visibility.
- At the end of the test, the MACHTEST® is disconnected and stored (no elements exposure).

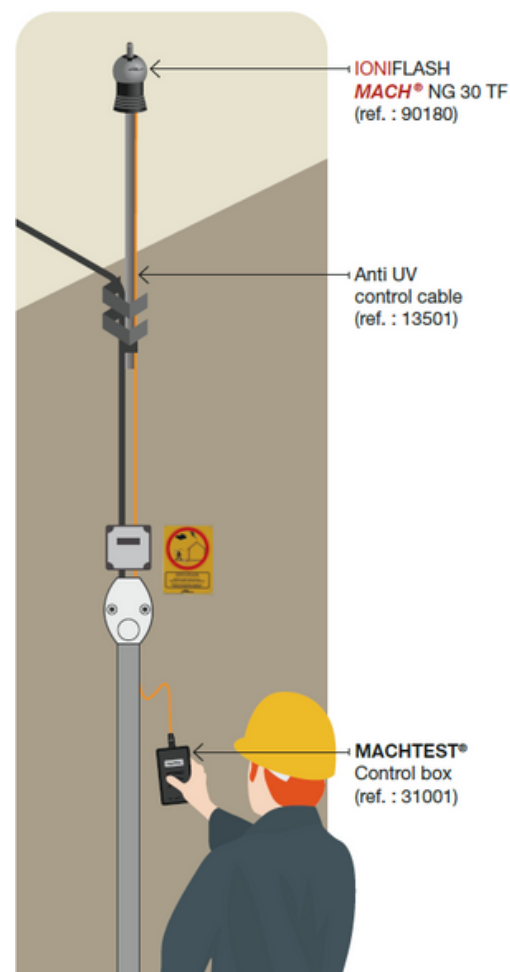

ONLY COMPATIBLE WITH
THE RANGE IONIFLASH MACH® NG TF



Qualifoudre
INERIS
N° 051168729019

CE

La FRENCH FAB