


TECHNICAL DATASHEET

FEATURES

Reference	30001
Description	DIGICOUNT®
Technology	Digital
Function mode	Activation with lightning current radiated fields
Detection range	1 kA - 100 kA
Recording	Until 999 999 events
Reset mode	Possibility to reset the counter display
Power supply	Lithium battery 3,6 Volts
Degree of protection	IP67
Operating temperature	-20°C to +70°C
Dimensions	80 x 60 x 30 mm
Weight	150 g

INSTALLATION

Parallel mounting	No need to cut the conductor Front face screwing
Connection	Directly on the down conductor
Design	Compact and discreet on the conductor
Robutness and liability	High resistance for climatical extreme conditions (rain, sun, frost...)

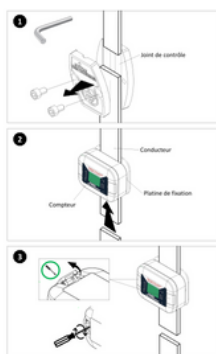

Exterior installation


Interior installation



STANDARD

NF EN 62 561 -6

Lightning protection system components (LPSC) - Part 6 : requirements for lightning strike counters (LSC)



Qualifoudre
INERIS
N° 051168729019



CONFORM TO
NF EN 62 561-6

La FRENCH FAB