



FP T1-275-25-3

Tree-phase - limp 25 kA - Uc 275 V - Up 1.5 kV

Reference: 24128

Location of use: Electrical panel
Earth connection: TT, TN-S/TN-C
Protection mode: L-PEN/L-N, N-PE
IEC/EN category: Class 1+2 / Type 1+2
Compliance: IEC 61643-11:2011 / IEC 61643-11:2011+A11:2018



Class 1 + 2

Technical Datasheet

SPD configuration			Tree-phase (3+0)
Nominal AC voltage (50/60 Hz)	Uo/Un		240 V
Maximum continuous operating voltage	Uc	(L-N) / (N-PE)	275 V / 305 V
Nominal discharge current (8/20 µs)	In	(L-N) / (N-PE)	25 kA / 100 kA
Maximum discharge current (8/20 µs)	I _{max}	(L-N) / (N-PE)	65 kA / 150 kA
Impulse discharge current (10/350 µs)	I _{limp}	(L-N) / (N-PE)	25 kA / 100 kA
Specific Energy	W/R	(L-N) / (N-PE)	156.2 kJ / Ω / 2500 kJ / Ω
Charge	Q	(L-N) / (N-PE)	12.5 As / 50 As
Voltage protection level	Up	(L-N) / (N-PE)	1.5 kV
Follow current interrupt rating (AC)	I _{fi}	(L-N) / (N-PE)	50 kA / 100 kA
Response time	t _A	(L-N) / (N-PE)	< 100 ns
Overcurrent protection (max)			315 A gG
Overcurrent protection (recommended)			125 A gG
Short-circuit current rating (AC)	I _{sc} cr	(L-N)	50 kA
TOV withstand 120 min	UT / Mode		442 V / Secure disconnection
TOV safe fail 200 ms	UT	(N-PE)	1200 V
Operating temperature range	T _a		-40°C à +85°C
Permissible operating humidity	RH		5%...95%
Terminal screw torque	M _{max}		4,5 Nm
Conductor cross-section (max)			2 AWG (rigide) / 4 AWG (flexible)
			35 mm² (rigide) / 25 mm² (flexible)
Mounting			Rail DIN 35 mm, EN 60715
Degree of protection			IP 20 (integrated)
Housing material			Thermoplastic: extinction degree UL 94 V-0
Thermal protection			Yes
"Operational / Fault" indication			Green / Red
Remote contacts (RC)			Yes
RC switching capacity			AC : 250 V / 1 A, 125 V / 1 A; DC : 48 V / 0.5 A, 12 V / 0.5 A
RC conductor cross-section (max)			16 AWG (rigide) / 1.5 mm² (rigide)





FP T1-275-25-3

Tree-phase - limp 25 kA - Uc 275 V - Up 1.5 kV

Reference: 24128

Location of use: Electrical panel

Earth connection: TT, TN-S/TN-C

Protection mode: L-PEN/L-N, N-PE

IEC/EN category: Class 1+2 / Type 1+2


Compliance: IEC 61643-11:2011 / IEC 61643-11:2011+A11:2018




Class 1 + 2

Technical Datasheet

Internal design

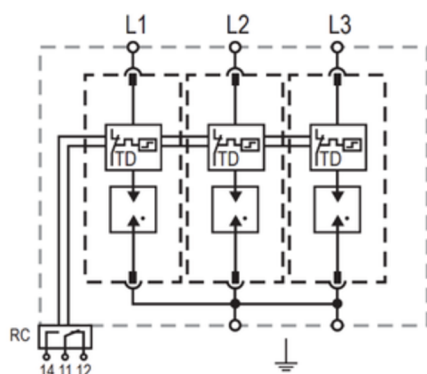


External design

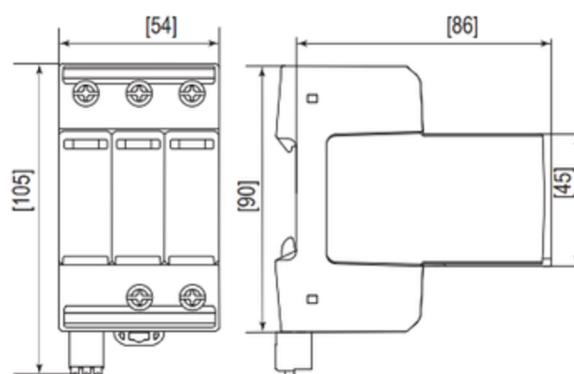

Reference	24128
Name	FP T1-275-25-3
Description	Tree-phase - limp 25 kA - Uc 275 V - Up 1.5 kV
Number of modules	3
Weight	514 g

Spare plug

Reference	24125	24192
Name	FP T1-275-25	FP T1N-305-100
Type	Phase	Neutral
Weight	105 g	105 g
Number of modules	1	1
Packaging dimensions	109 x 115 x 352 mm	109 x 115 x 352 mm

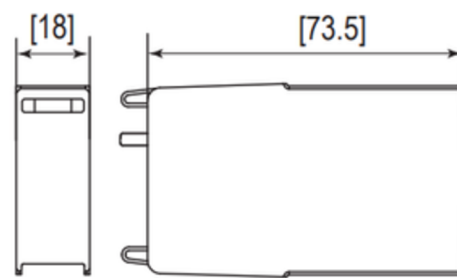

FRANCE PARATONNERRES SAS
 Parc Ester Technopole, 9 rue Columbia
 87068 Limoges - FRANCE
 +33 5 55 57 52 53
 contact@france-paratonnerres.com



Download catalog

